



Smart LED Projector

MPix
NPlay
Pixa
55



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 55 SMART LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 230V 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Home Theater Projectors for Movies, TV & Gaming etc..
- Projector comes with AV IN, AUX OUT, USB 2.0, HDMI x 2, mSD
- Built in Speaker
- Wide Compatibility
- Remote Control
- Miracast
- Dual band Connectivity (2.4GHz & 5GHz)

Specification :


Screen size	: 152-381 cm
Native Resolution	: 1920 x 1080 FHD
Max. Supported Resolution	: 1080p (max)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
Android Version	: 9.0
WI-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)

Bluetooth Version	: v5.0
Display Technology	: LED
Lamp Lifespan	: 50,000h
Brightness	: 8000Lumens
Contrast ratio	: 1000:1
Projection Distance	: 1.7m - 4.0m
Port Interface	: AV IN, AUX OUT, USB 2.0, HDMI x 2, mSD
Video file format	: AVI, MP4, MPG, MPEG1, MPEG2, MKV, WMV, MOV, FLV, H.264
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension (W x D x H)	: 25.5 x 20.5 x 10.5 cm
Net. weight	: 2.5kg

Package Contents:


Projector	: 1 U
Remote Control	: 1 U
Power cord	: 1 U
HDMI Cable	: 1 U
Cleaning cloth	: 1 U
QR Code Guide	: 1 U

Product Description :

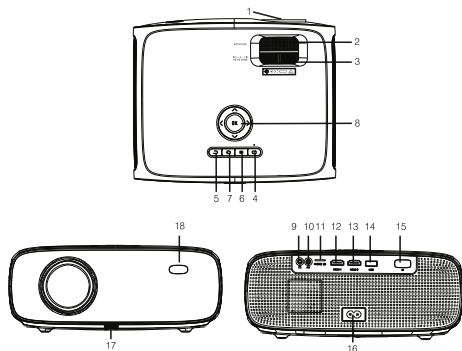


1. LENS
2. FOCUS ADJUSTMENT
3. KEYSTONE
4. STANDBY / AWAKE
5. RETURN
6. MENU
7. SOURCE INPUT
8. NAVIGATION
9. 3.5mm AUDIO OUTPUT
10. AV INPUT
11. MICRO SD CARD
12. HDMI PORT 1
13. HDMI PORT 2
14. USB PORT
15. IR WINDOW (Back)
16. AC INPUT PORT
17. ANGLE ADJUSTMENT
18. IR WINDOW (Front)

Remote Control :

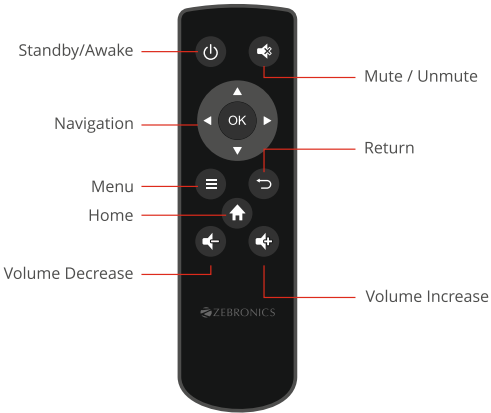


- | | |
|------------------|--------------------|
| 1. Standby/Awake | 5. Return |
| 2. Mute / Unmute | 6. Home |
| 3. Navigation | 7. Volume Increase |
| 4. Menu | 8. Volume Decrease |

Setting up the projector :

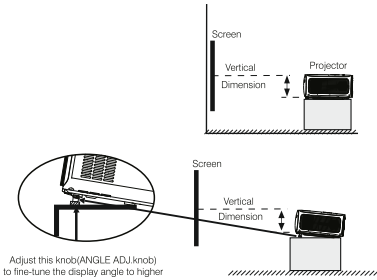


1. Before turning on make sure to place it in a flat surface for proper projection, then press the power button on the projector or on the remote.
2. Align the projector as shown in the image below to ensure proper projection.

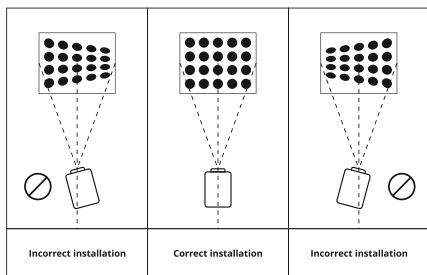

Projector distance & size :

The recommended projection screen size is 152-381cm. To improve your viewing experience, ensure you have a room where you can control the lighting. These factors work together to provide a visually stunning and immersive viewing experience.

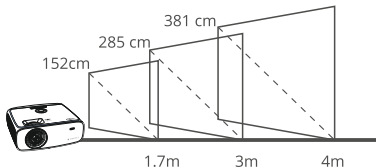


Note:

Due to optical device variation of about 3%, the above data is for reference only.

Adjust the Focus & Keystone :

The projector will auto keystone to 4-points, or you can manually adjust under settings

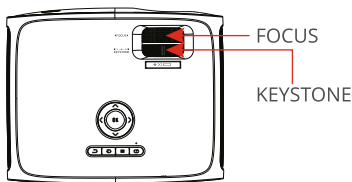


1. FOCUS : Adjust the lens focus wheel until you see a clear picture.
2. KEYSTONE : Keystone correction to facilitate horizontal angles.

Note:

In order to get best projection output, It is recommended to do keystone adjustment first and then do the focus adjustment.


HDMI Interface :

Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connecting, the content played on the source will be streamed on the projector.




USB/mSD Connections :

Insert the USB/mSD card into the corresponding slots. Choose "Source Input", Select "Video", "Music", "Picture" contents you want to play.




AUX OUT Connection :

The projector can be connected to a external audio system using a 3.5mm cable (not included)

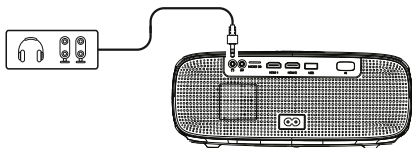

AV Input connection :

Connect the projector AV interface with the AV cable (not included)



Android Home :

Once the projector is turned on you'll be directed to the home screen. The Home screen displays Fav apps, App store, settings, File manager, Source Input – HDMI, USB, AV.



Settings :


This settings houses the following submenus Network settings, Bluetooth settings, projection settings, language setting, system update, other settings.



Bluetooth Setting :

1. Go to settings > BT settings
2. Turn the BT connection on and search for nearby BT device.
3. Select your BT device and connect with it.

Speaker Mode :



1. Go to settings > Speaker Mode and you can find this device name showing up on your source device. Tap on it and pair with it to use the projector as a BT speaker.

Screen Mirroring :

Connect your iOS, Android, Laptop, or Tablet wirelessly via the device mirroring option. Local photos and videos support Screen Mirroring.

NOTE:

Please ensure the projector and your device have been connected to the same Wi-Fi; if there is no Wi-Fi, please open a hotspot on your device and connect the projector.

ISO 9001:2015 Certified Company
www.zebronics.com

